


FRIALEN W30 COUDE ÉLECTROSOUDABLE À 30°

pression de service admissible : 16 bar (eau) / 10 bar (gaz).
Pour tubes SDR 11 à SDR 17,6.

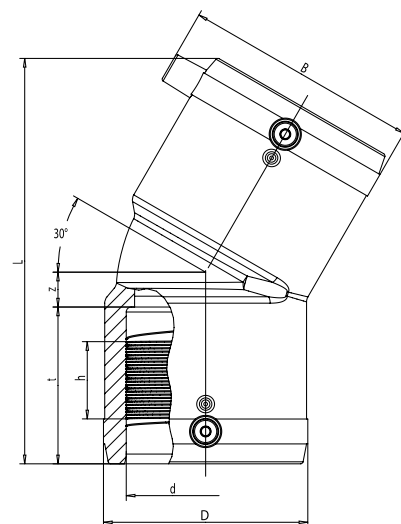

d	Code	D	L	t	z	h	B	Poids
mm		mm	mm	mm	mm	mm	mm	kg
90	61527220	115	224	71,5	23,5	43	123	0,780
110	61527320	142	252	83,0	27,0	47	157	1,260
125	61527420	158	270	85,0	29,5	51	162	1,640
160	61534020	199	350	96,0	40,0	59	198	3,870
180	61626120	229	390	101,0	79,0	57	234	4,800
200	61626220	254	412	106,0	83,5	54	256	6,350
225	61626320	281	456	123,0	86,0	64	282	8,560

INSTRUCTIONS DE MONTAGE DISPONIBLES SUR NOTRE SITE



d < 250 mm

www.aliaxis-ui.fr



d > 250 mm

