


FRIALEN W45 COUDE ÉLECTROSOUDABLE À 45°

pression de service admissible : 16 bar (eau) / 10 bar (gaz).
Pour tubes SDR 11 à SDR 17,6.

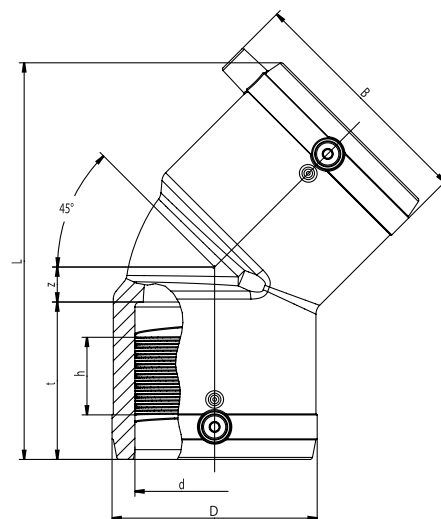

d	Code	D	L	t	z	h	B	Poids
25	61668720	35	89	38	7	17	48	0,050
32	61209220	43	102	44	8	21	60	0,070
40	61209420	54	120	49	11	29	70	0,110
50	61209620	66	136	54	13	32	80	0,175
63	61209820	82	158	62	14	34	95	0,295
75	61210020	96	198	70	29	38	111	0,520
90	61210220	115	232	79	35	45	128	0,810
110	61210420	138	265	85	41	50	150	1,320
125	61210620	157	279	87	46	44	167	1,770
160	61527520	207	377	92	88	44	210	4,410
180	61568720	228	382	97	83	65	229	4,610
200	61626420	254	415	106	87	54	256	6,760
225	61568820	280	450	112	98	66	281	8,290

INSTRUCTIONS DE MONTAGE DISPONIBLES SUR NOTRE SITE



d < 250 mm

www.aliaxis-ui.fr



d > 250 mm

