


FRIALEN MB MANCHON ÉLECTROSOUDABLE AVEC BUTÉE

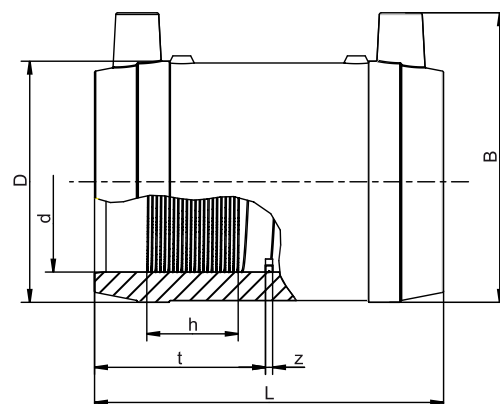

Le manchon est à spires affleurantes non revêtues

Pression de service admissible : 16 bar (eau) / 10 bar (gaz).
Pour tubes SDR 11 à SDR 17,6.

d	Code	BX	PU	D	L	t	z	h	B	Poids
mm		mm	mm	mm	mm	mm	mm	mm	mm	kg
20	612680	110	3520	33	60	29	2	17	49	0,040
25	612681	120	3840	38	66	32	2	18	55	0,050
32	612682	60	1920	45	78	38	2	21	61	0,064
40	612683	40	1280	54	85	42	2	23	71	0,100
50	612684	25	800	68	98	48	2	27	82	0,150
63	612685	15	480	82	110	55	2	29	96	0,221
75	612686	50	400	98	122	60	3	24	110	0,320
90	612687	30	240	114	138	68	3	41	130	0,440
110	612688	24	192	137	159	78	3	48	152	0,710
125	612689	16	128	156	172	85	3	51	169	0,950
140	612690	12	96	174	184	91	3	52	185	1,270
160	612691	8	64	199	190	94	3	52	207	1,770

INSTRUCTIONS DE MONTAGE DISPONIBLES SUR NOTRE SITE



d < 250 mm

www.aliaxis-ui.fr



d > 250 mm

