


FRIALEN TR TÉ ÉLECTROSOUDABLE DÉRIVATION RÉDUITE



d_1/d_2	Réf.	BX	PU	D	L	L_1	t	t_1	z	h	B	Poids kg/pc
32/20	616417	30	540	45,5	116	117	44	42	14	21,5	61,5	0,110
40/32	616418	20	360	54,5	146	148	45,5	51	27,5	24,5	70	0,170
50/32	616419	10	180	68,5	175	158	55	51	32,5	27,8	82	0,295
50/40	616420	10	180	68,5	175	167	55	55	32,5	27,8	82	0,315
63/32	616421	10	180	83,5	197	173	63	51	35,5	32	96	0,435
63/40	616422	10	180	83,5	197	182	63	55	35,5	32	96	0,450
63/50	616423	10	180	83,5	197	197	63	60	35,5	32	96	0,490

INSTRUCTIONS DE MONTAGE DISPONIBLES SUR NOTRE SITE

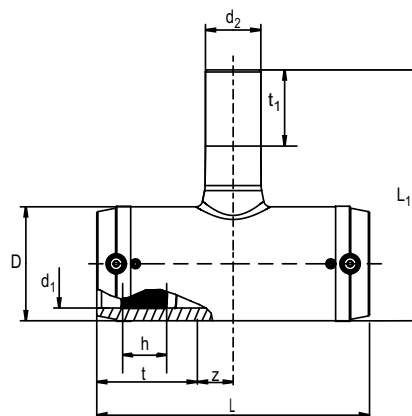

$d < 250 \text{ mm}$

www.aliaxis-ui.fr



$d > 250 \text{ mm}$